


Falcon Series

Vertical Axis Wind Turbines (VAWT)

WEPOWERTM

From Foreign Dependent to
Mother Nature Independent

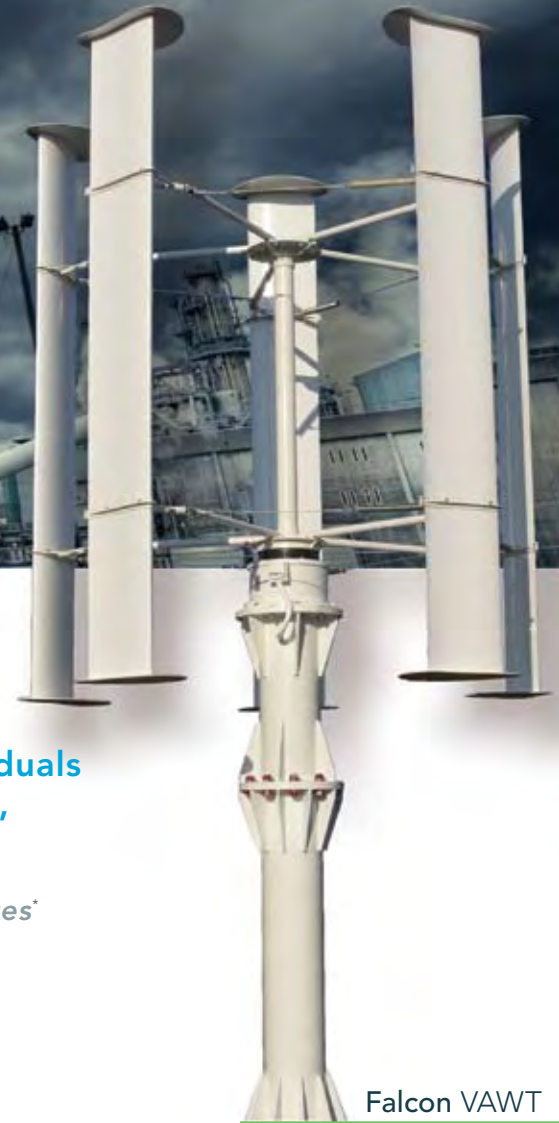

WePOWER is about change...

About providing a greener tomorrow...

About enabling communities, businesses and individuals to harness the power of wind as a source of natural, free, clean and renewable energy.

- **Eligible for 30% Federal + State and Utility Incentives/Rebates***
Details at Department of Energy: www.dsireusa.org
- Reduces Fossil Fuel Emissions and Carbon Footprint
- Aesthetically and Architecturally Pleasing
- Environmentally Friendly - Bird Safe, No Hazardous Fluids
- Few Moving Parts
- Extremely Quiet (Nearly Silent and Vibration Free)
- Captures Wind From any Direction
- Turbine Design Operates More Efficiently at Low Wind Speeds
- Generator Matched to Maximize Power from Low Wind Speeds
- Engineered to Last 20 years
- Virtually No Maintenance
- 5-Year Warranty

Falcon VAWT

www.WEPOWER.us
sales@wepower.us
866 385-WIND (9463)

32 JOURNEY SUITE 250
ALISO VIEJO, CA 92656

Falcon Series

Vertical Axis Wind Turbine (VAWT)

WEPOWER™

TECHNICAL SPECIFICATIONS	FALCON MODELS				
	600W	1.2kW	3.4kW	5.5kW	12kW
Annual Energy Production					
Assuming Wind Capture 20-40% of the Time at Rated Speed	1,130 kWh - 2,270 kWh Annually*	2,100 kWh - 4,200 kWh Annually*	5,950 kWh - 11,900 kWh Annually*	9,630 kWh - 19,270 kWh Annually*	21,000 kWh - 42,000 kWh Annually*
Performance					
Instantaneous Rated Power	600W*	1.2kW*	3.4kW*	5.5kW*	12kW*
Rated Wind Speed	29 mph (13 m/s)	29 mph (13 m/s)	29 mph (13 m/s)	29 mph (13 m/s)	29 mph (13 m/s)
Cut-In Speed	6 mph (2.7 m/s)	6 mph (2.7 m/s)	6 mph (2.7 m/s)	6 mph (2.7 m/s)	6 mph (2.7 m/s)
Maximum Wind Speed	111 mph (49.6 m/s)	111 mph (49.6 m/s)	111 mph (49.6 m/s)	111 mph (49.6 m/s)	111 mph (49.6 m/s)
Physical Parameters					
Size Rotor Diameter X Blade Length	5'5" (1.3m) X 3'3" (1m)	5'10" (1.78m) X 6'7" (2m)	9'10" (3m) X 11'10" (3.6m)	13'1" (4m) X 15'1" (4.6m)	19'8" (6m) X 20'4" (6.2 m)
Tower Height	18' (5.5m)	18' (5.5m)	18' (5.5m)	18' (5.5m)	18' (5.5m)
Gross Weight Excluding Tower	194 lbs (88 kg)	350 lbs (160 kg)	1,393 lbs (633 kg)	2,167 lbs (985 kg)	4,190 lbs (1905 kg)
Noise Level					
15 mph (6.7 m/s) @ 9' distance (3m)	32 dB	32 dB	32 dB	32 dB	32 dB
Output Controller					
Output Voltage (Off Grid)	24V DC	48V DC	48V DC	48V DC	48V DC
Output Voltage (Grid Connected)	200~400V AC	200~400V AC	200~400V AC	250~500V AC	250~500V AC
Generator					
Type	Permanent Magnet Direct Drive	Permanent Magnet Direct Drive	Permanent Magnet Direct Drive	Permanent Magnet Direct Drive	Permanent Magnet Direct Drive
Rated Temperature	-40°F to 239°F (-40°C to 115°C)	-40°F to 239°F (-40°C to 115°C)	-40°F to 239°F (-40°C to 115°C)	-40°F to 239°F (-40°C to 115°C)	-40°F to 239°F (-40°C to 115°C)
Grid Connected Inverter					
Input (DC) The grid connected inverter is supplied to meet local grid specifications.	200~400V DC	200~400V DC	200~400V DC	250~500V DC	250~500V DC
Electronic Overspeed Protection					
Governed Speed Style	Electronic Dump Load	Automatic Aerodynamic Variable Pitch	Automatic Aerodynamic Variable Pitch	Automatic Aerodynamic Variable Pitch	Automatic Aerodynamic Variable Pitch
Secondary Brake	Automatic Electromagnetic	Automatic Electromagnetic	Automatic Electromagnetic	Automatic Electromagnetic	Automatic Electromagnetic

www.WEPOWER.us
sales@wepower.us
 866 385-WIND (9463)

California
Energy
Commission



32 JOURNEY SUITE 250
ALISO VIEJO, CA 92656

Falcon 600W

Vertical Axis Wind Turbine (VAWT)

WEPOWER™



Suitable for any Application; Urban to Rural, Residential to Commercial, Industrial to Institutional

TECHNICAL SPECIFICATIONS :

Performance

Instantaneous Rated Power	600W*
Rated Wind Speed	29 mph (13 m/s)
Cut-In Speed	6 mph (2.7 m/s)
Maximum Wind Speed	111 mph (49.6 m/s)

Annual Energy Production

Assuming Wind Capture 1,130 kWh - 2,270 kWh Annually*
20-40% of the Time at
Rated Speed

Physical Parameters

Size	5'5" (1.3m) Rotor Diameter X 3'3" (1m) Blade Length
Tower Height	18' (5.5m)
Gross Weight	194 lbs (88 kg) Excluding Tower

Noise Level

15 mph (6.7 m/s) @ 9' distance (3m)	32 dB
--	-------

Output Controller

Output Voltage	24V DC (Off Grid)
Output Voltage	200~400V AC (Grid Connected)

Generator

Type	Permanent Magnet Direct Drive
Rated Temperature	-40°F to 239°F (-40°C to 115°C)

Grid Connected Inverter


Input (DC)	200~400V DC
------------	-------------

The grid connected inverter is supplied to meet local grid specifications.

Electronic Overspeed Protection

Governed Speed Style	Electronic Dump Load
Secondary Brake	Mechanical Drum

600W Power Curve

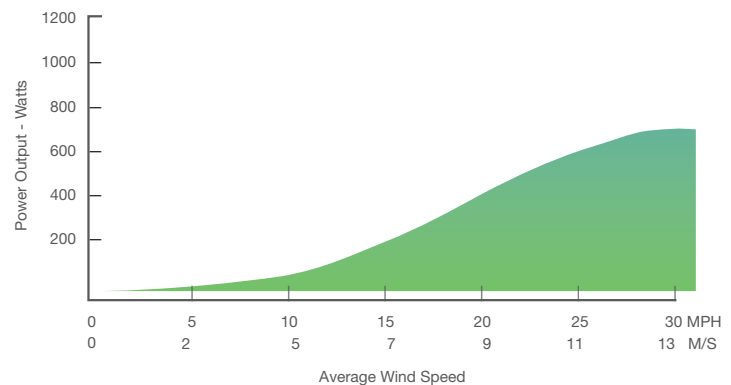

Fully Equipped for Grid Connection

Fully Eligible for 30% Federal + State
and Utility Incentives/Rebates**

Details at Department of Energy: www.dsireusa.org

Fully Eligible for Utility Company
Net Metering

www.WEPOWER.us
sales@wepower.us
866 385-WIND (9463)

California
Energy
Commission



32 JOURNEY SUITE 250
ALISO VIEJO, CA 92656

The information contained herein may change without notice. *Individual performance results may vary. **Subject to applicable regulations, restrictions and requirements.
(C) Copyright 2009 WePOWER, LLC. All rights reserved.

Falcon 1.2 kW

Vertical Axis Wind Turbine (VAWT)

WEPOWER™



Suitable for any Application; Urban to Rural, Residential to Commercial, Industrial to Institutional

TECHNICAL SPECIFICATIONS :

Performance

Instantaneous Rated Power	1.2kW*
Rated Wind Speed	29 mph (13 m/s)
Cut-In Speed	6 mph (2.7 m/s)
Maximum Wind Speed	111 mph (49.6 m/s)

Annual Energy Production

Assuming Wind Capture 2,100 kWh - 4,200 kWh Annually*
20-40% of the Time at
Rated Speed

Physical Parameters

Size	5'10" (1.78m) Rotor Diameter X 6'7" (2m) Blade Length
Tower Height	18' (5.5m)
Gross Weight	350 lbs (160 kg) Excluding Tower

Noise Level

15 mph (6.7 m/s) @ 9' distance (3m)	32 dB
--	-------

Output Controller

Output Voltage	48V DC (Off Grid)
Output Voltage	200~400V AC (Grid Connected)

Generator

Type	Permanent Magnet Direct Drive
Rated Temperature	-40°F to 239°F (-40°C to 115°C)

Grid Connected Inverter


Input (DC)	200~400V DC
------------	-------------

The grid connected inverter is supplied to meet local grid specifications.

Electronic Overspeed Protection

Governed Speed Style	Automatic Aerodynamic Variable Pitch
Secondary Brake	Mechanical Drum

1.2kW Power Curve

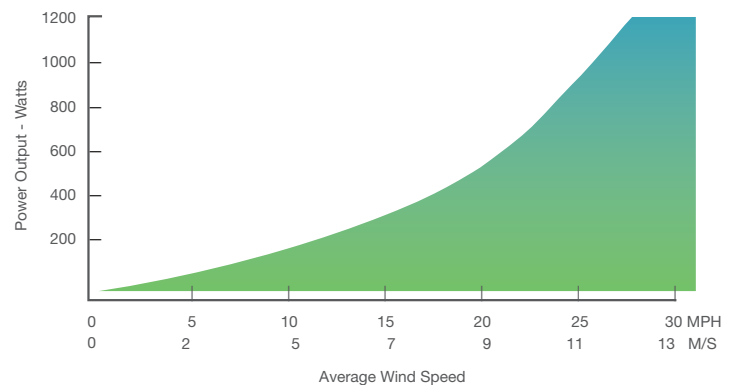

Fully Equipped for Grid Connection

Fully Eligible for 30% Federal + State
and Utility Incentives/Rebates**

Details at Department of Energy: www.dsireusa.org

Fully Eligible for Utility Company
Net Metering

www.WEPOWER.us
sales@wepower.us
866 385-WIND (9463)

California
Energy
Commission



32 JOURNEY SUITE 250
ALISO VIEJO, CA 92656

The information contained herein may change without notice. *Individual performance results may vary. **Subject to applicable regulations, restrictions and requirements.
(C) Copyright 2009 WePOWER, LLC. All rights reserved.

Falcon 3.4kW

Vertical Axis Wind Turbine (VAWT)

WEPOWERTM



Suitable for any Application; Urban to Rural, Residential to Commercial, Industrial to Institutional

TECHNICAL SPECIFICATIONS :

Performance

Instantaneous Rated Power	3.4kW*
Rated Wind Speed	29 mph (13 m/s)
Cut-In Speed	6 mph (2.7 m/s)
Maximum Wind Speed	111 mph (49.6 m/s)

Annual Energy Production

Assuming Wind Capture 20-40% of the Time at Rated Speed 5,950 kWh - 11,900 kWh Annually*

Physical Parameters

Size	9'10" (3m) Rotor Diameter X 11'10" (3.6m) Blade Length
Tower Height	18' (5.5m)
Gross Weight	1,393 lbs (633 kg) Excluding Tower

Noise Level

15 mph (6.7 m/s) @ 9' distance (3m)	32 dB
--	-------

Output Controller

Output Voltage	48V DC (Off Grid)
Output Voltage	200~400V AC (Grid Connected)

Generator

Type	Permanent Magnet Direct Drive
Rated Temperature	-40°F to 239°F (-40°C to 115°C)

Grid Connected Inverter


Input (DC)	200~400V DC
------------	-------------

The grid connected inverter is supplied to meet local grid specifications.

Electronic Overspeed Protection

Governed Speed Style	Automatic Aerodynamic Variable Pitch
Secondary Brake	Automatic Electromagnetic

3.4kW Power Curve

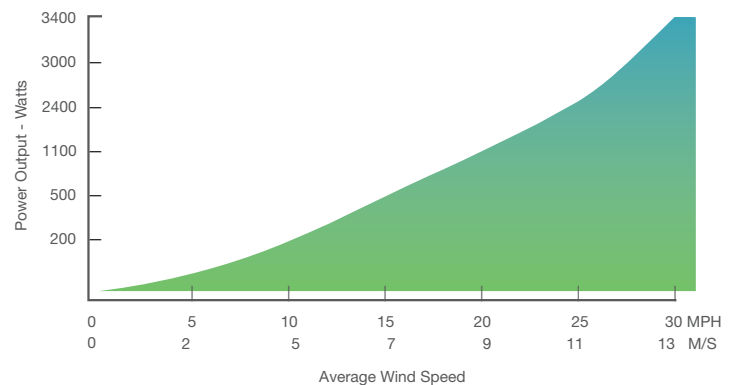

Fully Equipped for Grid Connection

Fully Eligible for 30% Federal + State and Utility Incentives/Rebates**

Details at Department of Energy: www.dsireusa.org

Fully Eligible for Utility Company Net Metering

www.WEPOWER.us
sales@wepower.us
866 385-WIND (9463)

California
Energy
Commission



32 JOURNEY SUITE 250
ALISO VIEJO, CA 92656

The information contained herein may change without notice. *Individual performance results may vary. **Subject to applicable regulations, restrictions and requirements.
(C) Copyright 2009 WePOWER, LLC. All rights reserved.

Falcon 5.5kW

Vertical Axis Wind Turbine (VAWT)

WEPOWER™



Suitable for any Application; Urban to Rural, Residential to Commercial, Industrial to Institutional

TECHNICAL SPECIFICATIONS :

Performance

Instantaneous Rated Power	5.5kW*
Rated Wind Speed	29 mph (13 m/s)
Cut-In Speed	6 mph (2.7 m/s)
Maximum Wind Speed	111 mph (49.6 m/s)

Annual Energy Production

Assuming Wind Capture 20-40% of the Time at Rated Speed 9,630 kWh - 19,270 kWh Annually*

Physical Parameters

Size	13'1" (4m) Rotor Diameter X 15'1" (4.6m) Blade Length
Tower Height	18' (5.5m)
Gross Weight	2,167 lbs (985 kg) Excluding Tower

Noise Level

15 mph (6.7 m/s) @ 9' distance (3m)	32 dB
--	-------

Output Controller

Output Voltage	48V DC (Off Grid)
Output Voltage	250~500 AC (Grid Connected)

Generator

Type	Permanent Magnet Direct Drive
Rated Temperature	-40°F to 239°F (-40°C to 115°C)

Grid Connected Inverter


Input (DC)	250~500 DC
------------	------------

The grid connected inverter is supplied to meet local grid specifications.

Electronic Overspeed Protection

Governed Speed Style	Automatic Aerodynamic Variable Pitch
Secondary Brake	Automatic Electromagnetic

5.5kW Power Curve

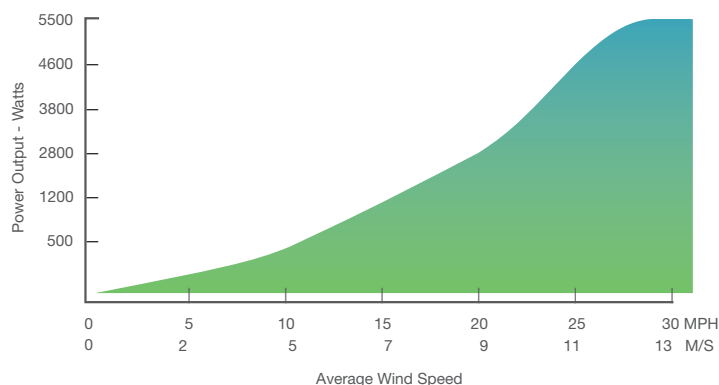

Fully Equipped for Grid Connection

Fully Eligible for 30% Federal + State and Utility Incentives/Rebates**

Details at Department of Energy: www.dsireusa.org

Fully Eligible for Utility Company Net Metering

www.WEPOWER.us
sales@wepower.us
866 385-WIND (9463)

California
Energy
Commission



32 JOURNEY SUITE 250
ALISO VIEJO, CA 92656

The information contained herein may change without notice. *Individual performance results may vary. **Subject to applicable regulations, restrictions and requirements.
(C) Copyright 2009 WePOWER, LLC. All rights reserved.

Falcon 12kW

Vertical Axis Wind Turbine (VAWT)

WEPOWER™



Suitable for any Application; Urban to Rural, Residential to Commercial, Industrial to Institutional

TECHNICAL SPECIFICATIONS :

Performance

Instantaneous Rated Power	12kW*
Rated Wind Speed	29 mph (13 m/s)
Cut-In Speed	6 mph (2.7 m/s)
Maximum Wind Speed	111 mph (49.6 m/s)

Annual Energy Production

Assuming Wind Capture 21,000 kWh - 42,000 kWh Annually*
20-40% of the Time at
Rated Speed

Physical Parameters

Size	19'8" (6m) Rotor Diameter X 20'4" (6.2 m) Blade Length
Tower Height	18' (5.5m)
Gross Weight	4,190 lbs (1905 kg) Excluding Tower

Noise Level

15 mph (6.7 m/s) @ 9' distance (3m)	32 dB
--	-------

Output Controller

Output Voltage	48V DC (Off Grid)
Output Voltage	250~500 AC (Grid Connected)

Generator

Type	Permanent Magnet Direct Drive
Rated Temperature	-40°F to 239°F (-40°C to 115°C)

Grid Connected Inverter


Input (DC)	250~500 DC
------------	------------

The grid connected inverter is supplied to meet local grid specifications.

Electronic Overspeed Protection

Governed Speed Style	Automatic Aerodynamic Variable Pitch
Secondary Brake	Automatic Electromagnetic

12kW Power Curve

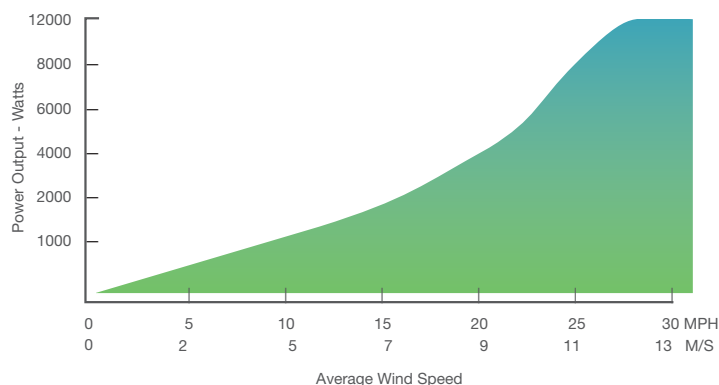

Fully Equipped for Grid Connection

Fully Eligible for 30% Federal + State
and Utility Incentives/Rebates**

Details at Department of Energy: www.dsireusa.org

Fully Eligible for Utility Company
Net Metering

www.WEPOWER.us
sales@wepower.us
866 385-WIND (9463)

California
Energy
Commission



32 JOURNEY SUITE 250
ALISO VIEJO, CA 92656

The information contained herein may change without notice. *Individual performance results may vary. **Subject to applicable regulations, restrictions and requirements.
(C) Copyright 2009 WePOWER, LLC. All rights reserved.